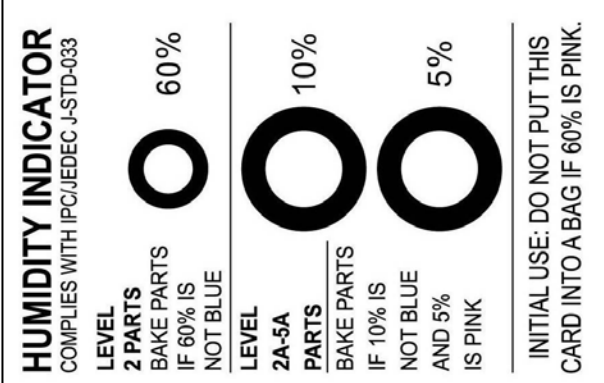



# PRODUCT SPECIFICATIONS

<b>Product code</b>	HM-03	<b>SPEC. Version</b>	A
<b>Product name</b>	5%, 10%,60%, humidity indicator card		
<b>Product image</b>		<b>Can</b>	
			

DESCRIPTION	CHARACTERISTICS
<b>Material</b>	Blotting Paper, 0.4mm
<b>Dimensions</b>	50mmx76mm(±2mm)
<b>Printing</b>	Heavy Black On White
<b>Packaging</b>	250 pcs per pint can , 12 can per carton  (Carton size : L33xW22.5xH27.5cm)
<b>Approx. Shipping Weight</b>	475gram (250pcs)/can , 6kg/carton
<b>Standards</b>	Meets GJB 2494-95 (Mil-I-8835)
<b>Color change</b>	Temperature of 23℃, when RH is exceed the indicated value, color of dots are pink, if the RH is under the indicate value, color of dots are blue.
<b>Reversible change</b>	The indicator spots are reversible, pink spots will change back to blue when the volume of air is dried. A humidity indicator card with pink as lavender spots can be returned to a blue color by placing indicators in a sealed can with desiccant (3pcs 5g molecular-sieve) four hours.
<b>Shelf Life</b>	Shelf Life 2 years from date of manufacture, provided container is not opened or damaged.
<b>Storage Condition</b>	Storage Keep in dry area away from sunlight under normal temperature condition (10 degree C ~ 40 degrees C)
<b>Precaution</b>	The indicators are water soluble and should not be placed in direct contact with liquid water, or metal. Do not keep can open for a long period of time. Immediately after each withdrawal the containers should be tightly resealed. Discard cards if indicating color overrun black circles.
<b>RoHs</b>	Not detected Cd, Pb, Hg, Cr, PBBs/PBBE